



Established in 2001, Schultz Manufacturing Company Ltd is a distributor of premium quality Catalytic Converters, Exhaust Systems, Pre-Bent Exhaust Pipes and Accessories.

	 7713353-04-10 Mazda 3, 2.0L & 2.3L	 7812136 98-02 VW Golf, Jetta & Beetle, 2.0L  7812135 99-05 VW- Various Models & Engine Sizes
<b>Universal Fit Converter</b> 43 SKUs	<b>Direct Fit Converter</b> 660+ Units Available	<b>Pre-Bent Exhaust Pipes</b> 27 SKUs

**100% Stainless Steel:** For Maximum Life.

**Ribbed Body:** Minimal Expansion & Distortion.

**Seam Welded:** Strong, Tight Bond.

**Monolithic Honeycomb Catalyst\*:** Keeps The Check Engine Light Out.

*\*Catalysts Supplied By Magnaflow*

### Schultz Product Warranty

**Catalytic Converters: 5 years/ 50K miles on external components & shell**

**Catalytic Converters: 25,000 miles on emissions.**

**WEBSITE: WWW.SCHULTZMFGCO.COM**

**Cataloging & Available Inventory On Website**

**Schultz Technical Support**

**Phone: (866) 394-4401**


**Note: Special Order Drop Ship Cost \$30 Per Direct Fit Unit**

**Representation: Connolly Sales & Marketing | (585) 624-2723**



# Catalytic Converters

Schultz manufactures to the highest degree of quality & craftsmanship to meet EPA National compliance for use with OBDII systems.

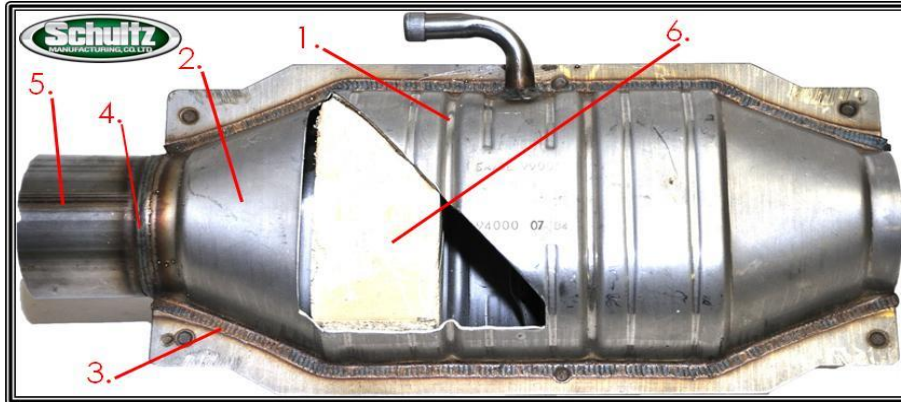

**1. Ribbed Body:** Schultz converters have a ribbed body that minimizes expansion and distortion.


**2. Stainless Steel:** All Schultz catalytic converters are made from 100% stainless steel.

**3. Seam Welded:** Schultz converters are seam welded close to the converter body for a strong, tight bond. Also guards against excessive stress on the welds caused by the stainless expanding from the effects of high exhaust gas temperatures.

**4.** Schultz converters have a  $\frac{1}{2}$ " lap-joint where the neck meets the body. The neck does not extend into the converter body where it could hamper exhaust flow.

**5. We provide correct sized inlets.** We don't put larger neck sizes on smaller bodies.

**6.** Schultz uses a **monolithic honeycomb catalyst\***, designed for max flow and surface area. All converters are loaded to OE specifications to be certain that your customers will pass emissions tests and keep the check engine light out. **\*Catalysts Supplied By Magnaflow**

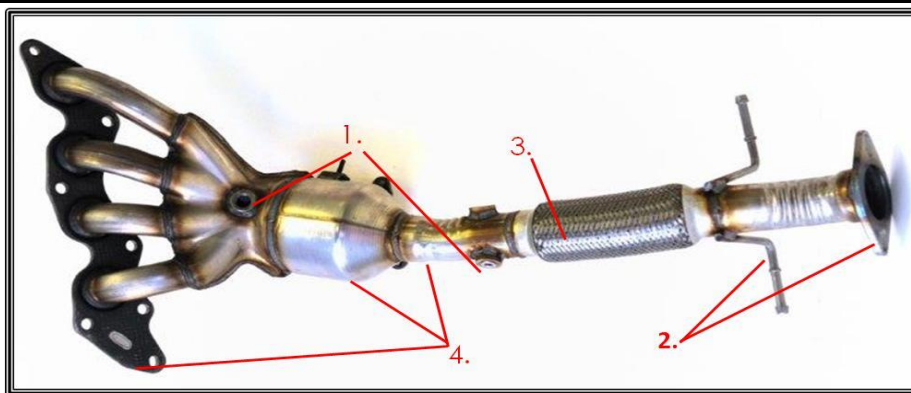

**1.** OE oxygen sensor bung positioning allows for the highest level of efficiency.

**2.** Quality Interlocked Inner Braided Flex Pipes maximizes flow.

**3.** OE Style Hanger and Flanges for superior fitment.

**4.** All Stainless Steel Construction for extreme durability.

**Catalytic Converters: 5 years/50K miles on external components & shell**  
**Catalytic Converters: 25,000 miles on emissions.**

**Schultz also includes gaskets for most of their converters.**  
**Saves the consumer \$5.00 - \$20.00 per unit!**